




SPECIFICATIONS



Housing: Housing is 20-gauge steel finished in a semi-gloss white powder coat finish.
Lamp housing/Reflector: Lamp housing/reflector is extruded, bright dip aluminum with clear anodized finish only. Lamp housing can be rotated for variable aiming.
Lens: Lens is hinged and latched and requires no tools to access lamp. Lens is diffuse tempered glass.
Mounting: Fixture may be wall mounted, ceiling mounted, stem mounted, semi-recessed in the wall or ceiling, or pendant mounted in double, triple or quad arrangements.
Lamping: Quartz lamping is 120-volt only.
Finish: Standard color is semi-gloss white powder coat paint. Lamp housing is bright dip, clear anodized only. Other standard colors are available from color chart. Custom colors are available.
Certification: UL, CUL, and IBEW labeled.



DIMENSIONS

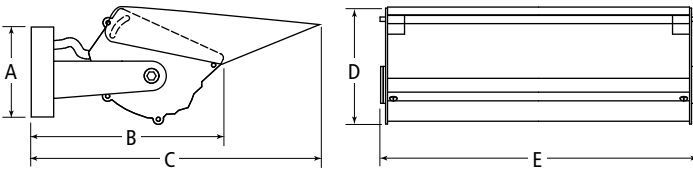

Series	A	B	C	D	E
ZAA-10	5 3/16"	8 3/8"	12 5/8"	5 5/8"	10"
	132	213	321	143	254

EXAMPLE

fixture series	lamp type and wattage	mounting	arm style	finish	voltage	options
ZAA-10	300QT	WM	MAZ1	SGW	120	GLR
ZAA-10	150QT -150W T4 DC base quartz 250QT -250W T4 DC base quartz 300QT -300W T3 RSC base quartz 350QT -350W T3 RSC base quartz	WM -wall mount CL - ceiling mount SR -semi-recessed ST/XX" -twin stem DB/XX" -double pendant TR/XX" -triple pendant QD/XX" -quad pendant (XX"=specify length from ceiling to bottom of fixture)	MAZ1 MAZ2 MAZ3	SGW -semi-gloss white (refer to color chart in Product Selection Guide for other standard colors) CC -custom color	120	GLR -GLR fusing and HLR holder V -cutoff visor SHB -box shroud SHW -wedge shroud SHC -curved shroud (shrouds are MAZ1 arms only, not for natatorium construction) NC -natatorium construction

Due to a program of continuous improvement, LAM Lighting reserves the right to make any variation in design or construction to the equipment described.

ORDER

project name: _____ type: _____ quantity: _____

- - - - - -