

SPECIFICATIONS



Trim: Trim ring is 20-gauge spun steel and attaches to luminous bowl with no visible hardware.

Luminous Bowl: Bowl is formed white opal acrylic standard with the option of three faux alabaster choices.

Reflector: Reflector is high reflectance white powder coat paint.

Mounting: Half-round sconces are wall mount only. Full-round sconces are wall or ceiling mount. HRADA is ADA compliant.

Electrical: Fluorescent ballasts are instant start, normal light output, high power factor, and sound rated A. Ballast factor varies between 0.86 and 0.90 depending on lamp wattage, number of lamps, and voltage. Consult factory for specific ballast factor.

Finish: Standard colors are available from color chart. Plated finishes and custom colors are available.

Certification: UL and CUL listed and IBEW labeled.



EXAMPLE

fixture series	lamps	lamps down	bowl style	finish	voltage	options
HRADA	1/27BX	N/A	HN	SGW	120	GLR
HRADA	1/27BX 2/18CFL	1/282D (HRWMA29 only)	HT-Traditional HC-Colonial HN-New England	SGW-semi-gloss white (refer to color chart in Product Selection Guide for other standard colors) SCH-satin chrome CH-polished chrome BR-polished brass AB-antique brass SBN-satin brushed nickel PN-polished nickel CC-custom color	120 277	GLR-GLR fuse and HLR holder GMF-GMF slow blow fuse and holder ALB/#-Faux alabaster bowl (see color chart for #) EM1-B70A or equal EM2-B50 or equal EM3-B100 or equal EM4-B60 or equal DIM1-Advance Mark VII dimming DIM2-Advance Mark X dimming DIM3-Lutron ECO-10 dimming ballast DIM4-Lutron Hi-Lume dimming ballast
HRSF20	1/382D					
HRSF26	2/32CFL 4/32CFL 2/42CFL 4/42CFL 1/39BX 2/39BX 3/39BX					
HRSC20	1/26CFL 1/27BX 250QT					
HRSC26	1/27BX 250QT 500QT					
HRWMA20	2/27BX 4/26CFL					
HRWMA29	4/32CFL 4/42CFL 3/39BX					


Due to a program of continuous improvement, LAM Lighting reserves the right to make any variation in design or construction to the equipment described. Check www.LamLighting.com for the most current spec sheet.

ORDER


project name: _____ type: _____ quantity: _____

- - - - - -


LAMP CONFIGURATIONS




HRSF20-2




HRSF26-1




HRSF26-2



HRSF26-3




HR-CFL




HRWMA29-3


STYLES



Traditional





Colonial




New England

HRADA DIMENSIONS




HRWMA DIMENSIONS

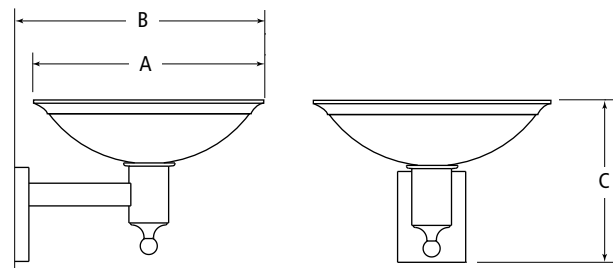


Diameter	A	B	C
20"	20 3/4" 527	22 1/16" 560	14 5/8" 341
29"	28 5/8" 727	30 1/4" 768	16 7/16" 418

HRSF DIMENSIONS



Diameter	A	B
20"	20 3/8" 517	8 5/8" 219
26"	28 11/16" 729	14 1/4" 362

HRSC DIMENSIONS

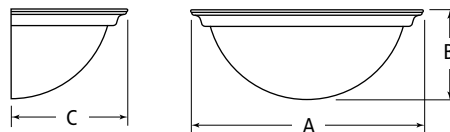

Diameter	A	B	C
20"	25 1/2" 647	11 1/2" 292	13 1/8" 333
29"	29 1/8" 739	12" 305	15 3/8" 390

EMERGENCY POWER

Fixture Diameter	Uplight lamps	Battery Location	Limitations
ADA	1/27	Remote	3-feet maximum remote distance
ADA	2/18	Remote	3-feet maximum remote distance
20	1/38	Remote	3-feet maximum remote distance
26	2/32	Integral	1 circuit (1 ballast)
26	4/32	Integral	1 circuit (1 ballast)
26	2/42	Integral	1 circuit (1 ballast)
26	4/42	Integral	1 circuit (1 ballast)
26	1/39	Integral	1 circuit (1 ballast)
26	2/39	Integral	1 circuit (1 ballast)
26	3/39	Integral	1 circuit (1 ballast)
20	1/26	Remote	3-feet maximum remote distance
20	1/27	Remote	3-feet maximum remote distance
26	1/27	Remote	3-feet maximum remote distance
20	2/27	Remote	3-feet maximum remote distance
20	4/26	Remote	3-feet maximum remote distance
29	4/32	Integral	1 circuit (1 ballast)
29	4/42	Integral	1 circuit (1 ballast)
29	3/39	Integral	1 circuit (1 ballast)

DIMMING

Fixture Diameter	Uplight lamps	DIM1	DIM2	DIM3	DIM4
ADA	1/27	No	No	No	No
ADA	2/18	Yes	Yes	No	No
20	1/38	No	No	No	No
26	2/32	Yes	Yes	No	No
26	4/32	Yes	Yes	No	No
26	2/42	Yes	Yes	No	No
26	4/42	Yes	Yes	No	No
26	1/39	Yes	Yes	Yes	Yes
26	2/39	Yes	Yes	Yes	Yes
26	3/39	Yes	Yes	Yes	Yes
20	1/26	Yes	Yes	No	No
20	1/27	No	No	No	No
26	1/27	No	No	No	No
20	2/27	No	No	No	No
20	4/26	Yes	Yes	No	No
29	4/32	Yes	Yes	No	No
29	4/42	Yes	Yes	No	No
29	3/39	Yes	Yes	Yes	Yes