


# IMPERIAL WALL MOUNT

## SPECIFICATIONS

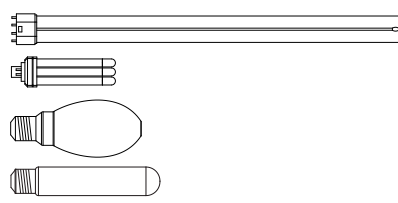

**Trim:** Trim ring is 20-gauge spun steel and attaches to luminous bowl with no visible hardware. Medallions are cast aluminum.

**Luminous Bowl:** Bowl is formed white opal acrylic standard with the option of three faux alabaster choices. Lamp housing has no open holes to minimize the collection of dust and debris in bowl. Optional dust cover (for fluorescent only).

**Reflector:** Biaxial fluorescent reflector is a combination of high reflectance specular aluminum and high reflectance white powder coat paint. CFL reflector is high reflectance white powder coat paint. HID reflector for vertical lamp is vertically fluted and for horizontal lamp is hydroformed, both have durable ALZAK finish. Horizontal lamp housing has a diffuse glass lens.


**Suspension:** Wall mount hook (WMH) or wall mount arm (WMA).

**Electrical:** Fluorescent ballasts are instant start, normal light output, high power factor, and sound rated A. Ballast factor varies between 0.86 and 0.90 depending on lamp wattage, number of lamps, and voltage. Consult factory for specific ballast factor. HID ballasts are remote.


**Finish:** Standard colors are available from color chart. Plated finishes and custom colors are available. Specify finish of trim ring, medallion, and suspension.

**Certification:** UL and CUL listed and IBEW labeled.

## WMA DIMENSIONS

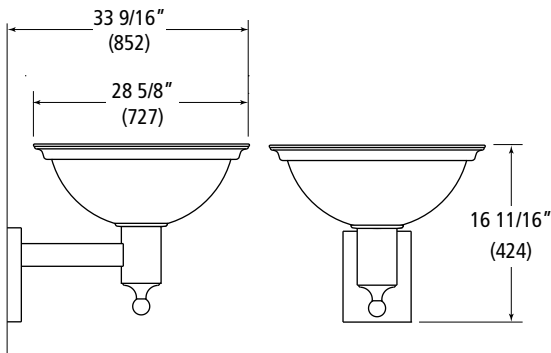

## WMH DIMENSIONS

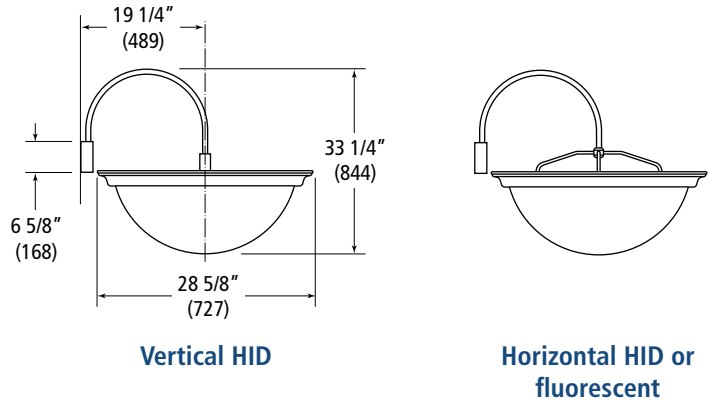

## EXAMPLE

series	lamps up	lamps down	trim ring style	suspension style	finish	voltage	options
<b>LB26</b>	<b>3/39BX</b>	<b>2/39BX</b>	<b>A</b>	<b>WMA</b>	<b>SGW</b>	<b>120</b>	<b>ALB/3</b>
LB26	4/32CFL 4/42CFL 3/39BX	1/32CFL 1/42CFL 2/39BX 3/39BX	A-Chippendale C-Torquay D-Severn J-Stafford K-Dorset L-Carlisle	WMH-wall mount hook WMA-wall mount arm (not available with vertical HID lamp)	SGW-semi-gloss white (refer to color chart in Product Selection Guide for other standard colors) SCH-satin chrome CH-polished chrome BR-polished brass AB-antique brass SBN-satin brushed nickel PN-polished nickel CC-custom color	120 277 347 (HID only)	GLR-GLR fuse and HLR holder GMF-GMF slow blow fuse and holder DC-dust cover (fluorescent only) ALB/#-faux alabaster bowl (see color chart for #) EM1-B70A or equal EM2-B50 or equal EM3-B100 or equal EM4-B60 or equal DIM1-Advance Mark VII dimming DIM2-Advance Mark X dimming DIM3-Lutron ECO-10 dimming ballast DIM4-Lutron Hi-Lume dimming ballast

vertical only


Due to a program of continuous improvement, LAM Lighting reserves the right to make any variation in design or construction to the equipment described.

## ORDER


project name: \_\_\_\_\_ type: \_\_\_\_\_ quantity: \_\_\_\_\_

-  -  -  -  -  -  -


FLUORESCENT LAMP CONFIGURATIONS




LB26 (3↑,1↓)



LB26 (3↑,2↓)




LB26 (3↑,3↓)




LB-CFL

TRIM RING STYLES




Chippendale




Torquay




Severn



Dorset



Stafford




Carlisle

REMOTE BALLAST DIMENSIONS


Ballast to Lamp Remote Mounting Distance

Lamp	Maximum one-way length of wire between lamp and ballast (feet) Voltage drop limited to 1% of lamp voltage					
Wattage	MH	#10	#12	#14	#16	#18
175	M57	425	265	165	105	65
250	M58	300	190	120	75	45
400	M59	200	125	75	50	30

**Note:** This data does not apply to pulse start lamps. Check ballast manufacturer's specs for most current information.

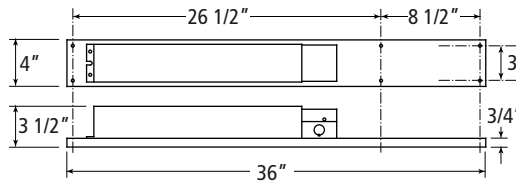

Remote Mounted Ballast  
(F-Can style for 175W MH, 250W MH, 400W MH)

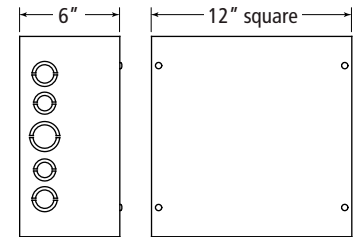

Remote Mounted Ballast Box  
(Core & coil or Encapsulated for 175W MH, 250W MH, 400W MH)

EMERGENCY POWER

Fixture Diameter	Uplight lamps	Downlight lamps	Battery Location	Limitations
26	4/32	1/32	Integral	1 circuit (1 ballast) uplight
26	4/42	1/42	Integral	1 circuit (1 ballast) uplight
26	3/39	1/39	Integral	1 circuit (1 ballast) uplight
26	3/39	2/39	Integral	1 circuit (1 ballast) uplight
26	3/39	3/39	Integral	1 circuit (1 ballast) uplight

DIMMING

Fixture Diameter	Uplight lamps	Downlight lamps	DIM1	DIM2	DIM3	DIM4	DIM5
26	4/32	1/32	Yes	Yes	No	Yes	No
26	4/42	1/42	Yes	Yes	No	Yes	No
26	3/39	1/39	Yes	Yes	Yes	Yes	No
26	3/39	2/39	Yes	Yes	Yes	Yes	No
26	3/39	3/39	Yes	Yes	Yes	Yes	No