

SPECIFICATIONS



Trim: Both upper trim ring and lower housing are 20-gauge spun steel. No fasteners are visible.

Luminous Bowl: Lens is formed white opal acrylic standard with the option of three faux alabaster choices. Perforated metal disc of powder coated painted steel is available (PM option). Lens and perforated disc are firmly held in place with no visible fasteners. Lamp housing has no open holes to minimize the collection of dust and debris in bowl. Dust cover is optional.

Reflector: Reflector is a combination of high reflectance specular aluminum and high reflectance white powder coat paint.

Optics: Maximum candlepower at 135 degrees or below on 4 and 6-lamp models to minimize brightness on ceiling above fixture and maximize fixture spacing. Recommended suspension is 24" or more.

Pendant Suspension: 5/8" OD stem with 30 degree swivel at canopy for single pendant units and 1" stem for chandelier units. Stem and canopy finish to be specified.

Arm Sconce Suspension: Wall mount only.



Electrical: Fluorescent ballasts are instant start, normal light output, high power factor and sound rated A. Ballast factor varies between 0.86 and 0.90 depending on lamp wattage, number of lamps and voltage. Consult factory for specific ballast factor.

Finish: Standard colors are available from color chart. Plated finishes and custom colors are available. Specify finish of trim ring, housing and suspension with canopy.

Certification: UL and CUL listed and IBEW labeled.

DIMENSIONS

Diameter	A	B	C	D
29"	28 5/8"	4 3/4"	8 7/8"	12 3/8"
	727	121	225	314
35"	34 5/8"	6"	11 3/8"	18 3/8"
	879	152	289	466
41"	41"	6 3/4"	12 1/4"	24 3/8"
	1041	171	311	619



EXAMPLE

fixture series	lamps	trim ring style	lens	suspension style	suspension length	trim finish	housing finish	suspension finish	voltage	options
LD35	4/39BX	A	ACR	SO	XX"	SGW	SGW	SGW	120	ALB/2
LD29	3/39BX	A- Chippendale	ACR - acrylic lens	SO -Stem Only	Ceiling to top of fixture	SGW -semi-gloss white	SGW -semi-gloss white	SGW -semi-gloss white	120	GLR -GLR fuse and HLR holder
LD35	4/39BX	B- Bullnose	PM - perforated metal disc	DBSO -Double Chandelier	in one inch increments (N/A for wall mount arm)	(refer to color chart in Product Selection Guide for other standard colors)	(refer to color chart in Product Selection Guide for other standard colors)	(refer to color chart in Product Selection Guide for other standard colors)	277 347 (40W only)	GMF -GMF slow blow fuse and holder
	6/39BX			TRSO -Triple Chandelier		SCH -satin chrome	SCH -satin chrome	SCH -satin chrome		DC -Dust cover
	3/40BX			QDSO -Quad Chandelier		CH -polished chrome	CH -polished chrome	CH -polished chrome		ALB/# -Faux alabaster bowl (see color chart for #)
	3/50BX			WMA -Wall mount arm (LD29 only)		BR -polished brass	BR -polished brass	BR -polished brass		EM1 -B70A or equal
	3/55BX					AB -antique brass	AB -antique brass	AB -antique brass		EM2 -B50 or equal
LD41	4/40BX					SBN -satin brushed nickel	SBN -satin brushed nickel	SBN -satin brushed nickel		EM3 -B100 or equal
	6/40BX					PN -polished nickel	PN -polished nickel	PN -polished nickel		EM4 -B60 or equal
	4/50BX					CC -custom color	CC -custom color	CC -custom color		DIM1 -Advance Mark VII dimming
	6/50BX									DIM2 -Advance Mark X dimming
	4/55BX									DIM3 -Lutron ECO-10 dimming ballast
	6/55BX									DIM4 -Lutron Hi-Lume dimming ballast


Due to a program of continuous improvement, LAM Lighting reserves the right to make any variation in design or construction to the equipment described. Check www.LamLighting.com for the most current spec sheet.

ORDER


project name: _____ type: _____ quantity: _____

_____ - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____


LAMP CONFIGURATIONS




LD29-3




LD35-3




LD35-4



LD35-6




LD41-4




LD41-6

TRIM RING STYLES







Chippendale



Bullnose


CHANDELIERS

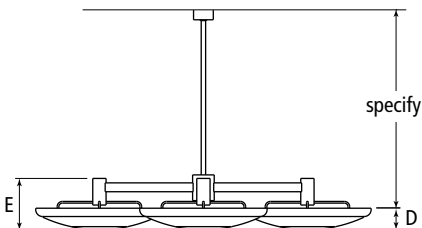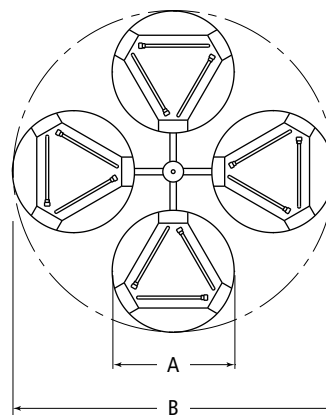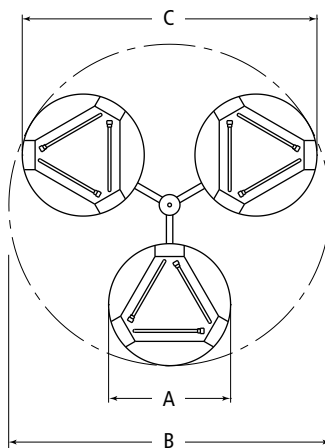

ARM CHANDELIER DIMENSION DATA

Diameter	A	B	C	D	E
29"	28 5/8"	75 5/8"	69 3/8"	4 3/4"	11 1/2"
	727	1921	1762	121	292
35"	34 5/8"	91 1/2"	83 7/8"	6"	12 7/8"
	879	2324	2130	152	327
41"	40 5/8"	107 1/4"	98 3/8"	6 3/4"	13 1/2"
	1032	2724	2499	171	343

WALL MOUNT DIMENSION DATA



EMERGENCY POWER

Fixture Diameter	Uplight lamps	Battery Location	Limitations
29	3/39	Integral	2 circuit (2 ballasts) uplight maximum
35	3/40	Integral	2 circuit (2 ballasts) uplight maximum
35	3/50	Integral	2 circuit (2 ballasts) uplight maximum
35	3/55	Integral	2 circuit (2 ballasts) uplight maximum
35	4/39	Integral	2 circuit (2 ballasts) uplight maximum
35	6/39	Integral	2 circuit (2 ballasts) uplight maximum
41	4/40	Integral	2 circuit (2 ballasts) uplight maximum
41	4/50	Integral	2 circuit (2 ballasts) uplight maximum
41	4/55	Integral	2 circuit (2 ballasts) uplight maximum
41	6/40	Integral	2 circuit (2 ballasts) uplight maximum
41	6/50	Integral	2 circuit (2 ballasts) uplight maximum
41	6/55	Integral	2 circuit (2 ballasts) uplight maximum

DIMMING

Fixture Diameter	Uplight lamps	DIM1	DIM2	DIM3	DIM4
29	3/39	Yes	Yes	Yes	Yes
35	3/40	No	No	Yes	Yes
35	3/50	No	No	Yes	Yes
35	3/55	Yes	Yes	No	No
35	4/39	Yes	Yes	Yes	Yes
35	6/39	Yes	Yes	Yes	Yes
41	4/40	Yes	Yes	Yes	Yes
41	4/50	No	No	Yes	Yes
41	4/55	Yes	Yes	No	No
41	6/40	Yes	Yes	Yes	Yes
41	6/50	No	Yes	Yes	Yes
41	6/55	Yes	Yes	No	No